
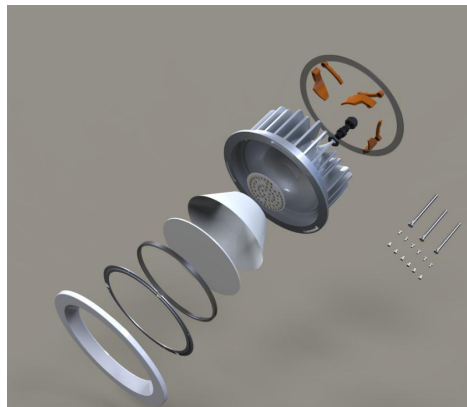


## MF 6" COB Down Light Specification

**Model NO.: MF-E600184**

Cut out:



Fixed COB Series

**UGR:19 KN<10% CRI>83**



IEC62031  
IEC60598-1  
IEC60598-2  
IEC61347  
Comply with Energy Star SSL

ErP CE



**CREE** **LIFUD**




**Product Data:**

<b>Input voltage</b>	220-240Vac, 50hz/60hz
<b>Product Size</b>	Dia210*90mm
<b>Cut out Size</b>	∅ 184mm
<b>Power(watt)</b>	30W/40W
<b>Color temperature</b>	3000K / 4000K / 5000K
<b>LED Chip</b>	Cree COB
<b>LED Driver</b>	Lifud (IP44) / Meanwell (IP65)
<b>PF</b>	≥0.95
<b>Housing Colour</b>	White RAL9003/ Sliver
<b>Luminous Flux (lm)</b>	30W: 2550LM@3000K, 2600LM@4000K, 2700LM@5000K, 40W: 3400lm @3000K, 3500lm@4000K, 3600lm@5000K
<b>CRI (Ra)</b>	>80
<b>Lifespan</b>	≥50000hrs
<b>Beam Angle</b>	40°
<b>Material</b>	Aluminum
<b>Operating Temperature</b>	-20°C ~50°C
<b>Dimmable</b>	Y
<b>IP</b>	IP44/IP65
<b>UGR</b>	<19
<b>Certificate</b>	CE/ RoHS
<b>Warranty Period</b>	3 /5 years


**Package:**




**Packing Size: (CM)**



**24(D1)\*23 (F1)\*12cm(H1)/PCS**  
**N.W: 1.2KG, G.W: 1.6KG**

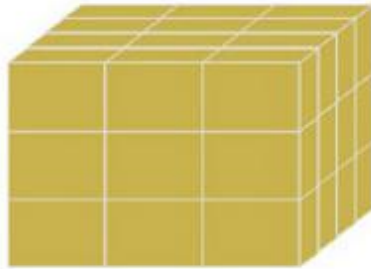

**12PCS/CTN**

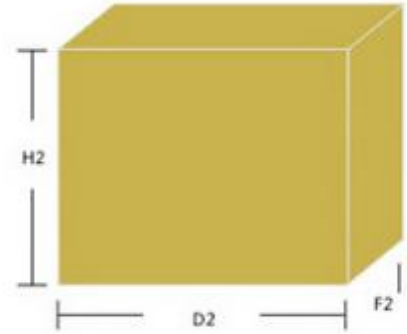

**51(D2)\*49.5(F2)\*38.5cm(H2)/12PCS**  
**N.W: 17.1KG, G.W: 17.9KG**

**Job reference photos from Ming Feng**

